

# Tower




HOXTER



H. ECO

Potenza termica nominale	7 kW	12 kW
Rendimento	83,2%	85,8%
Accumulo termico	4 h	5 h
CO (13% O <sub>2</sub> )	944 mg/Nm <sup>3</sup>	380 mg/Nm <sup>3</sup>
Polveri (13% O <sub>2</sub> )	27 mg/Nm <sup>3</sup>	13 mg/Nm <sup>3</sup>
OGC (13% O <sub>2</sub> )	54 mg/Nm <sup>3</sup>	30 mg/Nm <sup>3</sup>
NOx (13% O <sub>2</sub> )	122 mg/Nm <sup>3</sup>	98 mg/Nm <sup>3</sup>
Combustibile	Legna	Legna
Consumo di combustibile	2,2 Kg/h	-
Carica per funzionamento ad accumulo	3,5 Kg	3,5 Kg
Potenza erogata	13 kW	13 kW
Temperatura fumi	270°C	257°C
Portata fumi	7 g/s	11 g/s
Tubo uscita fumi	Ø180	Ø180
Tiraggio necessario	12 Pa	15 Pa
Raccordo presa aria comburente	Ø125	Ø125
Dimensioni piano fuoco	390x205 mm	390x205 mm
Peso	300 Kg	330 Kg
Distanza min. da parete non infiammabile	0 mm	0 mm
Classe di qualità D.M. n. 186/2017	4 stelle	5 stelle
Classe energetica		-
Conto termico	-	✓
Conforme alla normativa Ecodesign 2022	✓	✓
Conforme alla norma EN13229	✓	✓
Conforme alla norma EN13240	-	-
Marcatura CE	✓	✓

# Tower

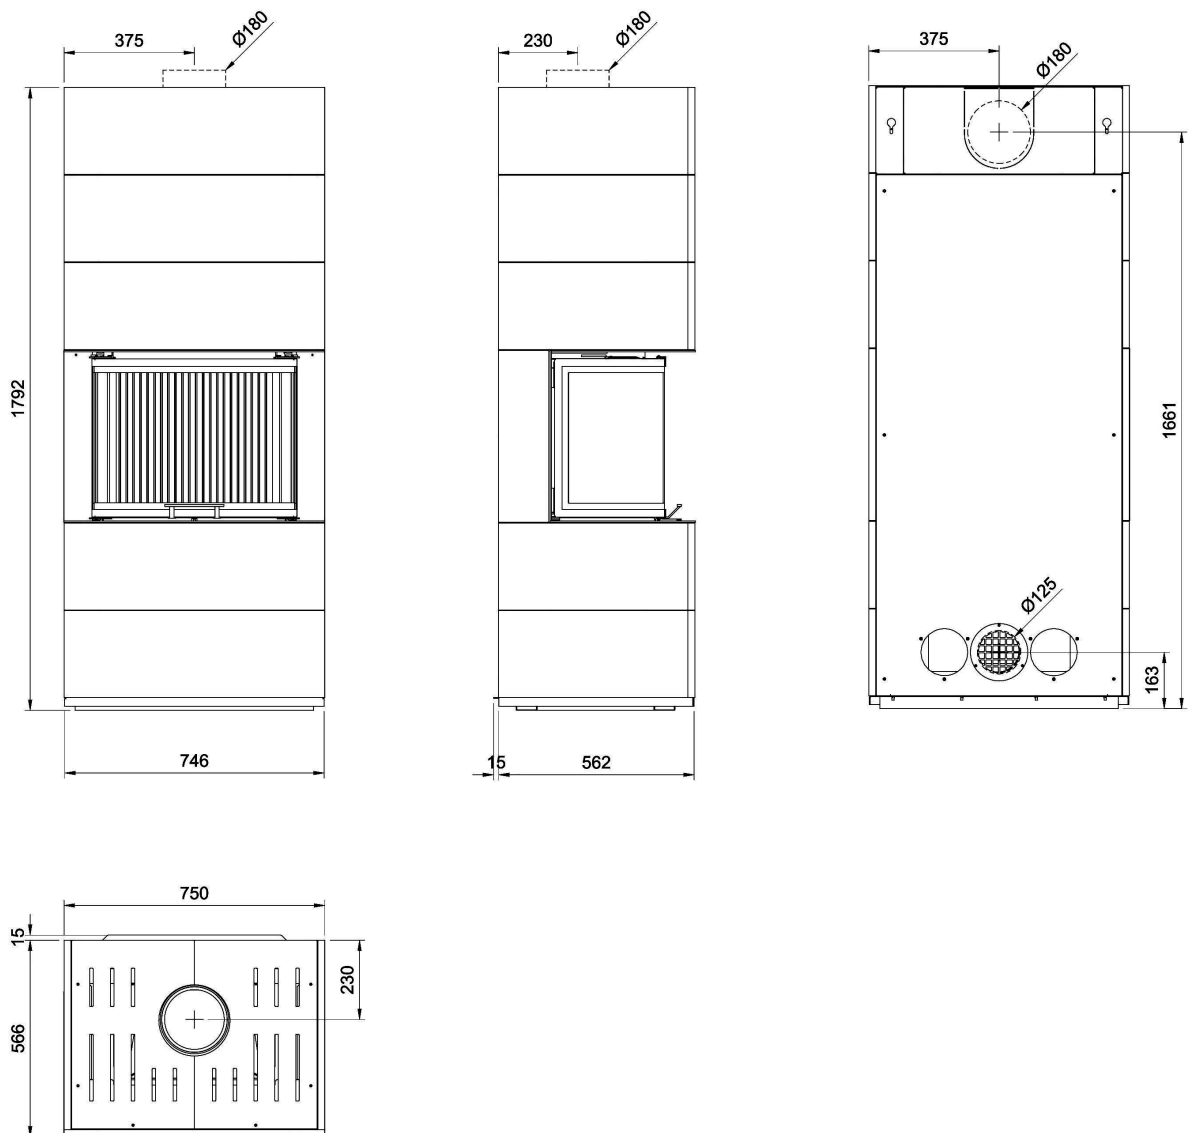

# Tower - AKU

